

Maxi free-standing Beacons / Rotating Mirror Light 883 Rotating Mirror Beacon LED 115-230VAC YE



Part No.: 883.330.60



MECHANICAL DATA

Diameter 14 Materials Pe Dome colour Ye	18 mm 42 mm PC C/ABS Yellow
Materials Person	YC YC/ABS
Properties	PC/ABS
	/ellow
Housing colour B	
	Black
Protection category IP	P65
Connection Se	screw terminals
cross-sectional area maximum 1,	.,50mm² / 16AWG
Cable entry R	Rubber pinch
Cable entry minimum d	l = 5 mm
Cable entry maximum d	l = 7 mm
	Pull-out protection
Type of fixing Ba	Base mounting
Working temperature minimum -3	30°C
Working temperature maximum +	-50°C
Weight with packaging 70	'65 g
Product weight 6	576 g
ELECTRICAL DATA	
Operating voltage 11	.15-230V
Operating voltage type A	NC
	0Hz 0Hz
Operating voltage tolerance +	-/- 10%
Rated operational voltage 2	30 VAC
Rated operational current 9!	95 mA
Rated inrush current 1.	400 mA
Protection class Pr	rotection class 2
Pollution degree 3	}
Overvoltage category II	
Isolation voltage U	Ji = 250V; Uimp = 2.500V
OPTICAL DATA	
Light source Li	ED
Light colour Ye	/ellow
Optical signal image	Revolving
Service life optical 50	0,000 h minimum
Rotation speed (rpm) 11	.80 U/min

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Maxi free-standing Beacons / Rotating Mirror Light 883 Rotating Mirror Beacon LED 115-230VAC YE

APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	Yes
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Maxi free-standing Beacons / Rotating Mirror Light 883 Rotating Mirror Beacon LED 115-230VAC YE

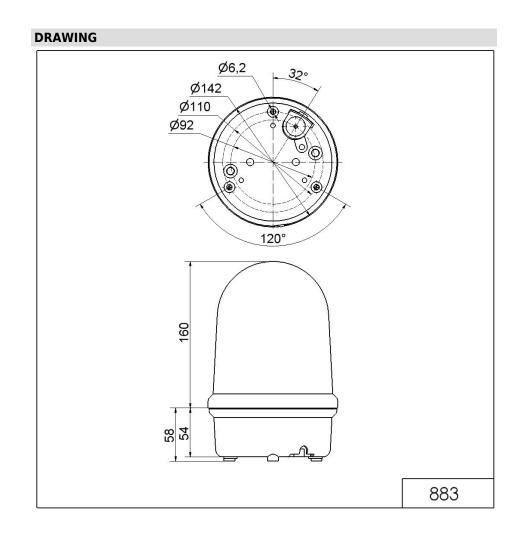

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.