

Signal Towers / Modular Signal Towers
LED Flashing light el. 24VDC YE


Part No.: 683.339.55

**MECHANICAL DATA**

Height	65 mm
Diameter	70 mm
Materials	PC
Dome colour	Yellow
Protection category	IP65
Working temperature minimum	-30°C
Working temperature maximum	+50°C
Weight with packaging	1 g
Product weight	1 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	90 mA
Rated inrush current	1.000 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

OPTICAL DATA

Light source	LED
Light colour	Yellow
Optical signal image	Double flash
Flash frequency	1 Hz
Service life optical	50,000 h maximum

APPROVAL DATA

Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No

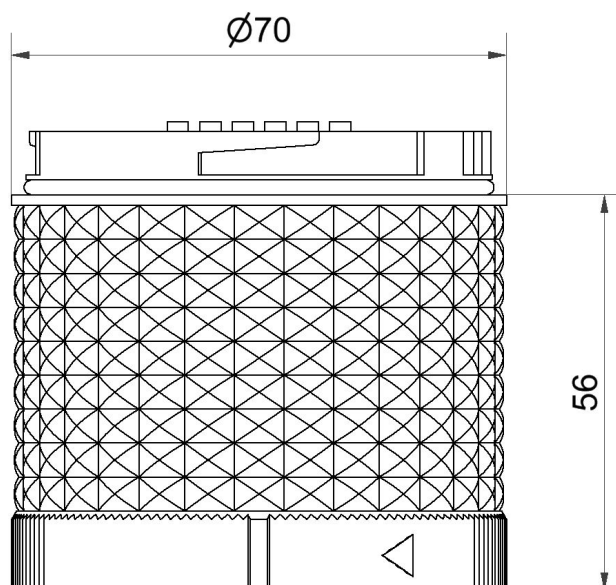


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Signal Towers / Modular Signal Towers

LED Flashing light el. 24VDC YE

ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

DRAWING

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.