Techn. datasheet

WERMA®

KombiSIGN 40 / DesignLOOK
Adapter for single hole mount. EM GY

Part No.:	**630.720.00**
Series:	**KombiSIGN 40**

c(UL)us

MECHANICAL DATA

Height	46 mm
Diameter	40 mm
Materials	PC
Housing colour	Grey
Protection category	IP66 IP69K
Cable entry	Through hole
Cable entry maximum	d = 9 mm
Type of fixing	Built-in mounting
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	30 g
Product weight	30 g

ELECTRICAL DATA

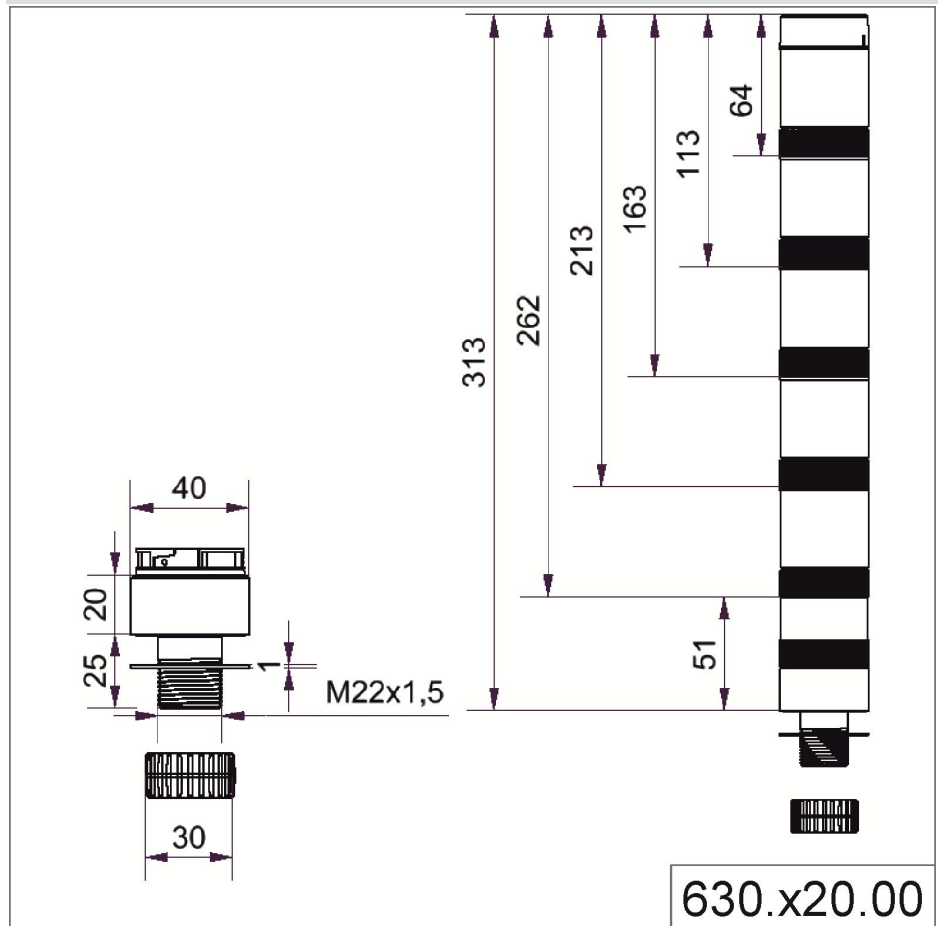|	
Pollution degree	3 In the connection area: 2

APPROVAL DATA

Conforms with CE	No
Conforms with RoHS directive	Fulfills substance restriction
WEEE	No
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	No
Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

WERMA Signaltechnik GmbH + Co. KG · Dürbheimer Straße 15 · D-78604 Rietheim-Weilheim
Tel +49(0) 74 24 95 57-0 · Fax +49(0) 74 24 95 57-44 · info@werma.com · www.werma.com
21.06.2024 / 630.720.00

1/2

KombiSIGN 40 / DesignLOOK
Adapter for single hole mount. EM GY

DRAWING

630.x20.00

WERMA Signaltechnik GmbH + Co. KG · Dürbheimer Straße 15 · D-78604 Rietheim-Weilheim
Tel +49(0) 74 24 95 57-0 · Fax +49(0) 74 24 95 57-44 · info@werma.com · www.werma.com
21.06.2024 / 630.720.00

2/2