

Completely pre-assembled Signal Towers / CST 55C  
**CST55 colored BU/GN/YE/RD/FB180**



Part No.: 659.750.55



MECHANICAL DATA	
Height	369 mm
Diameter	57 mm
Materials	ABS Aluminium PC PC/ABS
Dome colour	Blue Green Red Yellow
Housing colour	Grey
Protection category	IP40
Connection	Stranded wires (tinned)
Tension relief	Pull-out protection
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	428 g
Product weight	329 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated inrush current	530mA
Protection class	Protection class 2
Pollution degree	2

OPTICAL DATA	
Light source	LED
Light colour	Red White
Optical signal image	Permanent
Service life optical	50,000 h maximum

APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	No

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.


## Completely pre-assembled Signal Towers / CST 55C **CST55 colored BU/GN/YE/RD/FB180**

Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	25 years
Conforms with VdS	No

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / CST 55C  
**CST55 colored BU/GN/YE/RD/FB180**

**DRAWING**

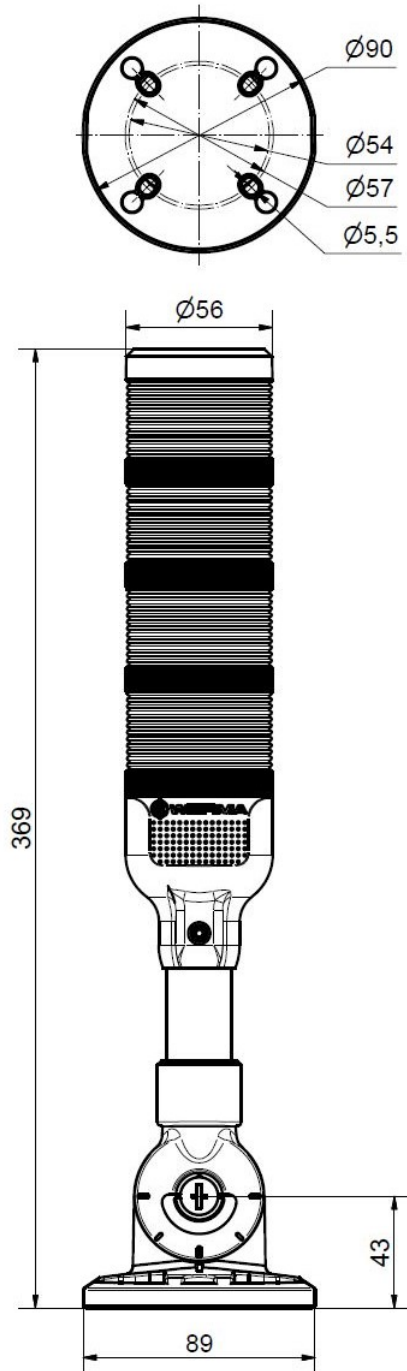

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.