

Completely pre-assembled Signal Towers / CST 55  
**CST55 Pulse tone 24VDC GN/YE/RD FB180 GY**



Part No.:	659.999.02
Series:	CST 55



MECHANICAL DATA	
Height	343 mm
Diameter	56 mm
Materials	Aluminium PC PC/ABS
Dome colour	Clear
Housing colour	Grey
Protection category	IP40
Cable length	650 mm
Tension relief	Pull-out protection
Type of fixing	Base mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	400 g
Product weight	290 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	150 mA
Rated inrush current	150
Protection class	Protection class 2
Pollution degree	2

OPTICAL DATA	
Light source	LED
Light colour	Green Red Yellow
Optical signal image	Permanent
Service life optical	50,000 h maximum

ACOUSTIC DATA	
Volume (max) at 1m distance	85
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz

**APPROVAL DATA**

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

## Completely pre-assembled Signal Towers / CST 55 **CST55 Pulse tone 24VDC GN/YE/RD FB180 GY**


Conforms with CE	Yes
WEEE	No
Conforms with CCC	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	10 years
Conforms with VdS	No



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / CST 55  
**CST55 Pulse tone 24VDC GN/YE/RD FB180 GY**

**DRAWING**

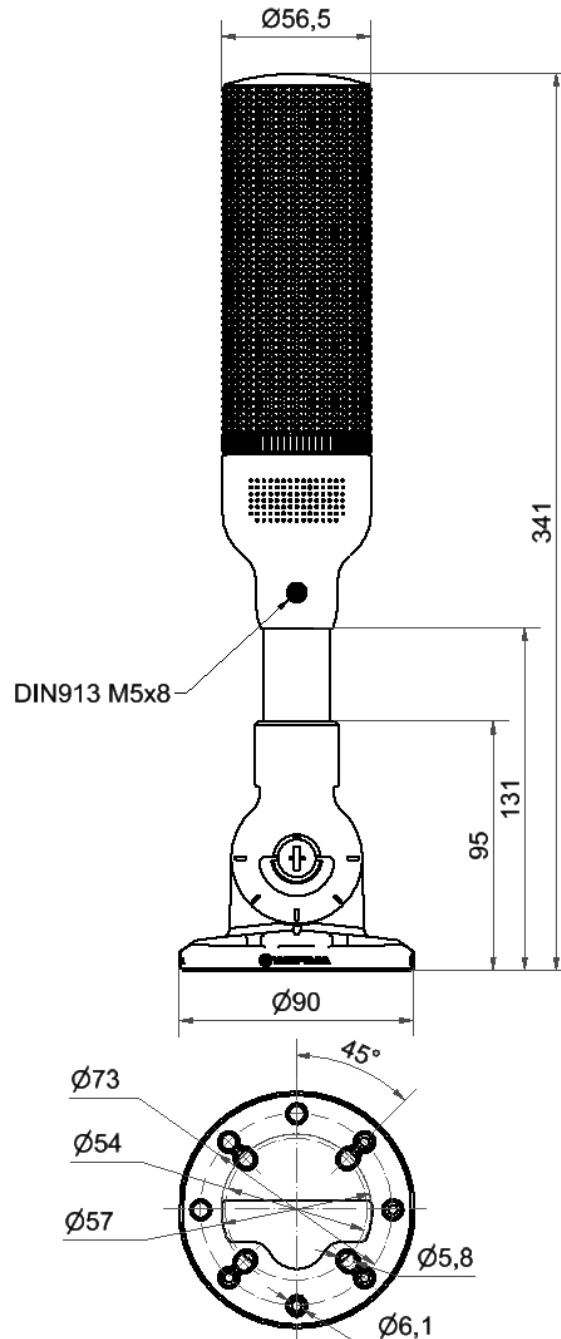

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.